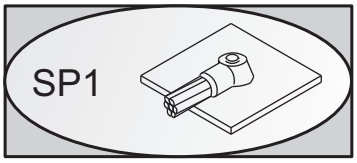

CU-TECH ThermexWELD exothermic welding



stranded

sq mm		
10	W-Cu45	-
16	W-Cu45	-
16	W-Cu45	A-SCuK7
25	W-Cu45	-
30	W-Cu45	-
35	W-Cu45	-
50	W-Cu45	-
70	W-Cu65	-
95	W-Cu90	-
120	W-Cu115	-
150	W-Cu150	-
185	W-Cu200	-
240	W-Cu200	-
300	W-Cu250	-

STANDARD				
SP1-S-D4	S	T-401	-	T-109 / T-330
SP1-S-D5	S	T-401	-	T-109 / T-330
SP1-S-K7	S	T-401	-	T-109 / T-330
SP1-S-G6	S	T-401	-	T-109 / T-330
SP1-S-C7	S	T-401	-	T-109 / T-330
SP1-S-H7	S	T-401	-	T-109 / T-330
SP1-M-C9	M	T-431	-	T-110 / T-330
SP1-M-C11	M	T-431	-	T-110 / T-330
SP1-M-A13	M	T-431	-	T-110 / T-332
SP1-M-C14	M	T-431	-	T-110 / T-332
SP1-M-C16	M	T-431	-	T-110 / T-333
SP1-M-C18	M	T-431	-	T-110 / T-333
SP1-M-A21	M	T-431	-	T-110 / T-333
SP1-M-A23	M	T-431	-	T-110 / T-333

PIXY				
SP1-P-C9	P	T-401	-	T-109 / T-330
SP1-P-C11	P	T-401	-	T-109 / T-330

solid

dia mm		
8	W-Cu45	-
10	W-Cu65	-
12	W-Cu65	-
16	W-Cu115	-

STANDARD				
SP1-M-C8	M	T-431	-	T-110 / T-330
SP1-M-C10	M	T-431	-	T-110 / T-330
SP1-M-C12	M	T-431	-	T-110 / T-330
SP1-M-C16	M	T-431	-	T-110 / T-332

PIXY				

Note 1:

If installer already has the T-431 General Purpose Tool Kit THEN only the mould clamp needs to be ordered with this mould type, see table above as conductors above 120 sq mm utalise the mould clamp that is in the T-431 Kit.
If only this type of mould is being used and the installer has NO T-431 THEN use kit type T-410 on the smaller conductors, see table above as sizes from 10 sqmm to 95 sq mm need the mould handle in the table.

LECTRO-TECH (Pty) Limited Tel:+27 (0)11 786-4818 Fax:+27 (0)11 786-4819 email: info@lectro-tech.co.za website: www.lectrotech.co.za