CU-TECH ThermexWELD exothermic welding

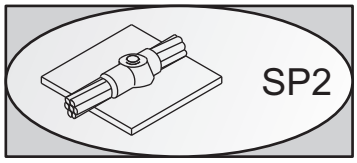

stranded

sq mm			STANDARD					PIXY				
10	W-Cu45	-	SP2-S-D4	S	T-401	-	T-109 / T-330					
16	W-Cu45	-	SP2-S-D5	S	T-401	-	T-109 / T-330					
16	W-Cu45	A-SCuK7	SP2-S-K7	S	T-401	-	T-109 / T-330					
25	W-Cu45	-	SP2-S-G6	S	T-401	-	T-109 / T-330					
30	W-Cu45	-	SP2-S-C7	S	T-401	-	T-109 / T-330					
35	W-Cu45	-	SP2-S-H7	S	T-401	-	T-109 / T-330					
50	W-Cu90	-	SP2-M-C9	M	T-431	-	T-110 / T-332	SP2-P-C9	P	T-401	-	T-109 / T-330
70	W-Cu115	-	SP2-M-C11	M	T-431	-	T-110 / T-332					
95	W-Cu115	-	SP2-M-A13	M	T-431	-	T-110 / T-332					
120	W-Cu150	-	SP2-M-C14	M	T-431	-	T-110 / T-333					
150	W-Cu200	-	SP2-M-C16	M	T-431	-	T-110 / T-333					
185	W-Cu250	-	SP2-M-C18	M	T-431	-	T-110 / T-333					
240	2 x W-Cu150	-	SP2-L-A21	L	T-431	T-111	T-111 / T-334					
300	2 x W-Cu200	-	SP2-L-A23	L	T-431	T-111	T-111 / T-334					

solid

dia mm			STANDARD					PIXY				
8	W-Cu90	-	SP2-M-C8	M	T-431	-	T-110 / T-332					
10	W-Cu115	-	SP2-M-C10	M	T-431	-	T-110 / T-332					
12	W-Cu115	-	SP2-M-C12	M	T-431	-	T-110 / T-332					
16	W-Cu200	-	SP2-M-C16	M	T-431	-	T-110 / T-333					

Note 1:

If installer already has the T-431 General Purpose Tool Kit THEN only the mould clamp needs to be ordered with this mould type, see table above as conductors above 35 sq mm utalise the mould clamp that is in the T-431 Kit.
If only this type of mould is being used and the installer has NO T-431 THEN use kit type T-410 on the smaller conductors, see table above as sizes from 10 sqmm to 35 sq mm need the mould handle in the table.

LECTRO-TECH (Pty) Limited Tel:+27 (0)11 786-4818 Fax:+27 (0)11 786-4819 email: info@lectro-tech.co.za website: www.lectrotech.co.za