


CU-TECH ThermexWELD exothermic welding

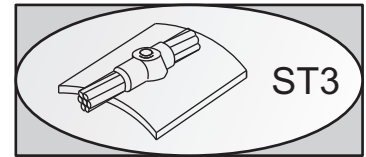

stranded

sq mm		
10	W-Cu32	A-SCuD4
16	W-Cu32	-
16	W-Cu45	A-SCuK7
25	W-Cu32	-
30	W-Cu45	-
35	W-Cu45	-
50	W-Cu65	-

STANDARD					
ST3-S-D4:xxx	S	T-410	-	T-109 / T-330	
ST3-S-D5:xxx	S	T-410	-	T-109 / T-330	
ST3-S-K7:xxx	S	T-410	-	T-109 / T-330	
ST3-S-G6:xxx	S	T-410	-	T-109 / T-330	
ST3-S-C7:xxx	S	T-410	-	T-109 / T-330	
ST3-S-H7:xxx	S	T-410	-	T-109 / T-330	
ST3-S-C9:xxx	S	T-410	-	T-109 / T-330	

PIXY				

PIPE DIAMETER

mm

- A 60-70
- B 70-90
- C 90-105
- D 105-115
- E 115-125
- F 125-135
- G 135-145
- H 145-165
- J 165-190
- K 190-220
- L 220-250
- M 250-300
- N 300-330
- P 330-350
- R 350-450
- S 450-550
- T 550-700
- U 700-1000
- V 1000+